


ALUMINIUM LINKS

AKR

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.



	L
	G
	JOINTING COMPOUND
Z	JOINTING COMPOUND '

All dimensions in mm

3. REQUIRED

TE INTERNAL SALES USE ONLY

SDECIEIC ATIONS

1. STANDARDS & GUIDELINES

Catalogue No.	Conductor	F	G	L
	Range mm²	Recommende	ed Lengths	Max
AKX10-35/1	10-35	32	32	80
AKX50-70/1	50-70	32	32	136
AKX95-120/1	95-120	60	60	136
AKX150-185/1	150-185	60	60	142
AKX240-300/1	240-300	60	60	142
AKX400-630/1	400-630	70	70	142
AKX630-800/1	630-800	115	115	260
AKX800-1000/1	800-1000	115	115	260

2. CONDUCTOR DETAILS

LARGE END			SMALL END				SPECIFICATIONS	
	Metric Imperial	Area: mm²/in²		Metric	Imperial	Area: mm²/in²	Dimensions: (IF NON-STAND	DARD)
	Flexible	Area. IIIII7III		Flexible		Area. IIIII / III		mm
	Compacted	Stranding:		Compacto	ed	Stranding:	G:	mm
	Other			Other			Qty:	
	Comments:							

4. CUSTOMER DETAILS

Company:	Part No: AKR
Requested by:	Sales Order No:
Tel:	Drawing No:
Purchase Order No:	Entered by:

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU


ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE




BI-METAL LINKS

BKR

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.





All dimensions in mm

3. REQUIRED

1. STANDARDS & GUIDELINES

	Catalogue No.	Conductor Range mm2	Copper - F Recommended	Aluminium - G Lengths	L Max		
	BKX10-35/1	10-35	21.5	32	70		
	BKX50-70/1	50-70	21.5	32	70		
	BKX95-120/1	95-120	40	60	120		
	BKX150-185/1	150-185	40	60	120		
	BKX240-300/1	240-300	40	60	120		
	BKX400-500/1	400-500	60	70	160		
	BKX400-630/1	400-630	60	70	160		

2. CONDUCTOR DETAILS

LARGE END: MATERIAL - AI SMALL END: MATERIAL - Cu					Cu	SPECIFICATIONS		
Metric Imperial	Area: mm²/in²		Metric	Imperial	Area: mm²/in²	Dimensions: (IF NON-STAI	NDARD	
Flexible			Flexible			F: G:	mm mm	
Compacted	Stranding:		Compact	ed	Stranding:			
Other			Other			Qty:		
Comments:								

4 CUSTOMER DETAILS

CUSTOMER DETAILS	TE INTERNAL SALES USE ONLY
Company:	Part No: BKR
Requested by:	Sales Order No:
Tel:	Drawing No:
Purchase Order No:	Entered by:

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU

ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE

BI-METAL LONG PALM LUG BGLP

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.



1.	STANDARD	S & GUIDE	ELINE	S		All d	imensions	in mm	
	Catalogue No.	Conductor Range mm ²	A Min	B Max	C Ref	E Ref	F Ref	L Ref	M Ref
	BGLPX95-120	95-120	12	81	50	105	70	240	M20
	BGLPX150-185	150-185	18	69	50	105	70	240	M20
	BGLPX240-300	240-300	23	59	50	105	70	240	M20
	BGLPX400-630	400-630	23	59	50	105	70	240	M20

4.	CUSTOMER	DETAILS		TI	E INTE	RNAL	SAL	ES USE	ONLY
	Comments:								
	Other				Qty:				
	Compacted	Stranding:			L:		mm	Stud M:	mm
	Flexible	Area:	mm²/in²		E:		mm	F:	mm
	Metric Imperial				Dimensio A:	ns:	mm	В:	mm
2.	CONDUCTO	R DETAILS		3.	REQU	IIRED	SPE	CIFICAT	IONS
_	BOLFA400-030	400 030		<u> </u>	30	103	70	240	11120
	BGLPX400-630	400-630	23 59	9	50	105	70	240	M20

Part No: BGLP Company: Requested by: **Sales Order No:** Tel: **Drawing No: Purchase Order No: Entered by:**

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU

ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE






BI-METAL LUG

BGX

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.





1.	1. STANDARDS & GUIDELINES			All dimensions in mm			
	Catalogue No.	Conductor Range mm2	C Ref	D Ref	F Max	L Max	M Max
	BGX16-70	16-70	22	4.5	35	70	M12
	BGX95-120	95-120	30	6	60	117	M16
	BGX150-300	150-300	35	7	60	125	M16

2.	CONDUCTOR	R DETAILS	3. REQUIRED SPECIFICATIONS
	Metric Imperial		Dimensions:
	Flexible	Area: mm²/in²	L:m
	☐ Compacted Stranding:		F:m
		Stranding:	Stud M: m
	Other		Qty:
	Comments:		


4. CUSTOMER DETAILS	TE INTERNAL SALES USE ONLY
Company:	Part No: BGX
Requested by:	Sales Order No:
Tel:	Drawing No:
Purchase Order No:	Entered by:

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU

ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE

BI-METAL SECTOR LINKS BKS

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.



STANDADDS & GILIDELINES

١.	STANDARD	S & GOIDELIN	NE3	All dimensions in i	11111	
	Catalogue No.	Conductor Sector mm ²	Conductor Range Copper - mm ²	Copper - F Length Max	L Max	
	BKSX	35-240	16-300	65	160	

2. CONDUCTOR DETAILS

	SECTOR END: MATERIAL - AI				SMALL END: MATERIAL - Cu					
		3 Core	35mm²	☐ 50mm²	☐ 70mm²		Metric	☐ Imperial	Area:	mm²/in²
		4 Core	☐ 95mm²	120mm ²	☐ 150mm²		Flexible		Stranding:	
			☐ 185mm²	240mm ²			Compact	ted		
							Other			
3.	RE	QUIR	RED SPEC	CIFICAT	IONS					
	Dim	ensions:	(IF NON-STANI	DARD)						
	E:				mm	Qty:				mm
	Com	nments:								

TE INTERNAL SALES USE ONLY 4. CUSTOMER DETAILS Part No: BKS Company:

Requested by: Sales Order No: Tel: **Drawing No:**

Purchase Order No: Entered by:

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU

ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE





BI-METAL SECTOR STALK LUGS BSS

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.



1. STANDARDS & GUIDELINES All dimensions in mm Catalogue No. Conductor D E - Cu Sector mm² Max Max Max 70 ■ BSSX 35-240 35 160

2. CONDUCTOR DETAILS

SECTOR END: MATERIAL - AI

3 Core	35mm ²	50mm ²	70mm²	95mm²	120mm ²	150mm ²	☐ 185mm²	240mm

4 Core

3. REQUIRED SPECIFICATIONS

Stalk Diameter: (D)	mm
Dimensions: (IF NON-STANDARD)	
E:	mm
Qty:	mm
Comments:	

4. CUSTOMER DETAILS

Company:	Part No: BSS
Requested by:	Sales Order No:
Tel:	Drawing No:
Purchase Order No:	Entered by:

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU

ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE

SPECIALLY MANUFACTURED PRODUCTS CANNOT BE RETURNED FOR CREDI

TE INTERNAL SALES USE ONLY






BI-METAL SQUARE PALM LUG BGSP

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.





1. STANDARDS & GUIDELINES

Catalogue No.	Conductor Range mm ²	A Min	C Ref	E Ref	F Max	L Max	M Max
☐ BGSPX95-500	95-500	25	50	50	70	160	M20
□ BGSPX630-800	630-800	30	60	60	115	220	M20

2. CONDUCTOR DETAILS

3. REQUIRED SPECIFICATIONS

All dimensions in mm

Metric Imper	rial	Dimensions:			
Flexible	Area: mm²/in²	A:	mm	B:	mm²
Compacted	Stranding:	E:	mm	F:	mm
Other		L:	mm	Stud M:	mm
Comments:		Qty:			

CUSTOMER DETAILS	TE INTERNAL SALES USE ONLY
Company:	Part No: BGSP
Requested by:	Sales Order No:
Tel:	Drawing No:
Purchase Order No:	Entered by:


5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU


ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE



BI-METAL STALK LUGS BS

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.





I. STANDARDS					
Catalogue No.	Conductor Range mm²	D Max	E - Cu Max	F - Al Max	L Max
BSX10-35/1	10-35	12	30	32	70
BSX50-70/1	50-70	16	30	32	70
BSX95-120/1	95-120	22	50	60	120
BSX150-185/1	150-185	26	50	60	120
BSX240-300/1	240-300	33	50	60	120
BSX400-630/1	400-500	45	70	70	160

2. CONDUCTOR DETAILS 3. REQUIRED SPECIFICATIONS

Metric		
Flexible	Area:	mm²/in
Compacted	Stranding:	
Other		
Comments:		

Stalk Diameter (D):	mm
Dimensions: (IF NON-STANDARD)	
E:	mm
F:	mm
Qty:	

4. CUSTOMER DETAILS

Company:		
Requested by:		
Tel:		
Purchase Order No:		

TE INTERNAL SALES US	E ONLY
Part No: BS	
Sales Order No:	
Drawing No:	
Entered by:	

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU


ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE



COPPER LINKS

CKR

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.

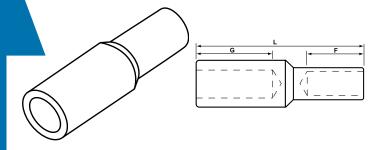

. STANDARDS & GUIDELINES				
Catalogue No.	Conductor Range mm ²	F Recomme	G nded Lengths	L Max
CKX10-35/1	10-35	24	24	60
☐ CKX50-70/1	50-70	24	24	60
☐ CKX95-120/1	95-120	38	38	92
☐ CKX150-185/1	150-185	38	38	92
CKX240-300/1	240-300	44	44	237
CKX400-500/1	400-500	59	59	145
☐ CKX630/1	630	59	59	145
СКХ800/1	800	90	90	210

3. REQUIRED 2. CONDUCTOR DETAILS **SPECIFICATIONS LARGE END SMALL END Dimensions: (IF NON-STANDARD)** ■ Metric ■ Imperial ■ Metric ☐ Imperial Area: mm²/in² Area: mm²/in² F: Flexible Flexible G: Compacted Stranding: Compacted Stranding: Qty: ☐ Other Other **Comments:**

4. CUSTOMER DETAILS	TE INTERNAL SALES USE ONLY
Company:	Part No: CKR
Requested by:	Sales Order No:
Tel:	Drawing No:
Purchase Order No:	Entered by:

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU


ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE



COPPER LUGS

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.





All dimensions in mm

3. REQUIRED SPECIFICATIONS

1. STANDARDS & GUIDELINES

Catalogue No.	Conductor Range mm ²	A Min	B Max	C Ref	D Ref	E Max	F Max	L Max	M Max
CGX25/1	25	8.0	54	16.7	1.9	70	40	114	M10
CGX35/1	35	8.0	74	18.2	2.7	90	45	145	M12
CGX50/1	50	11.0	78	20.6	2.8	100	50	159	M12
CGX70/1	70	11.0	78	21.0	3.2	100	50	161	M12
CGX95/1	95	12.0	76	25.0	4.0	100	50	161	M12
CGX120/1	120	15.0	70	30.0	4.8	100	50	165	M20
CGX150/1	150	18.0	64	34.0	5.4	100	50	166	M20
CGX185/1	185	18.0	64	37.0	5.2	100	55	173	M20
CGX240/1	240	23.0	64	42.0	7.1	110	90	221	M20
CGX300/1	300	23.0	64	46.0	7.9	110	90	222	M20
CGX400/1	400	23.0	64	49.6	7.9	110	90	227	M20
CGX500/1	500	23.0	64	54.8	8.2	110	90	223	M20
CGX630/1	630	25.0	50	63.5	11.5	100	90	225	M20

2. CONDUCTOR DETAILS

	Metric Impe	erial	Dimensions:		
	Flexible	Area: mm²/in²	A:	mm	B:
_	1 TOXIDIO	,	E:	mm	F:
	Compacted	Stranding:	L:	mm	Stud M:
	Other				
			Qty:		
	Comments:				

4. CUSTOMER DETAILS

CUSTOMER DETAILS	TE INTERNAL SALES USE ONLY
Company:	Part No: CG
Requested by:	Sales Order No:
Tel:	Drawing No:
Purchase Order No:	Entered by:

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU

ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE


SPECIALLY MANUFACTURED PRODUCTS CANNOT BE RETURNED FOR CREE


mm² mm mm



COPPER STALK LUGS

- 1. Tick a box to identify the standard blank which is closest to your required design.
- 2. Complete the Conductor Details section inserting your requirements. Please note all details are mandatory.
- **3. Enter your required dimensions** staying within the guidelines in the standards table.
- 4. Complete customer contact and authorisation details. Please note all details are mandatory.
- 5. Fax to Utilux Custom Connectors.





STANDARDS & GUIDFLINES

 SIANDARDS & GO			7 (11 (31111011310113	7 11 1 1 1 1 1 1 1	
Catalogue No.	Conductor Range mm ²	D Max	E Recommended	F I Length	L Max
CSX10-35/1	10-35	12	50	21.5	92
CSX50-70/1	50-70	16	50	21.5	92
CSX95-120/1	95-120	22	50	35	237
CSX150-185/1	150-185	26	70	35	237
CSX240-300/1	240-300	33	90	50	237
CSX400-500/1	400-500	39	100	60	212

2. CONDUCTOR DETAILS

Metric		
Flexible	Area:	mm²/in
Compacted	Stranding:	
Other		
Comments:		

3. REQUIRED SPECIFICATIONS

All dimensions in mm

Stalk Diameter (D):	mm
Dimensions: (IF NON-STANDARD)	
E:	mm
F:	mm
Qty:	

4. CUSTOMER DETAILS

Company:		
Requested by:		
Tel:		
Purchase Order No:		

TE INTERNAL SALES USE ONLY

Part No: CS **Sales Order No: Drawing No: Entered by:**

5. EMAIL THIS FORM TO ENGINEERING SUPPLIES - SALES@ENGSUP.COM.AU

ORDERS FAXED TO UTILUX CUSTOM CONNECTORS BY 3PM WILL BE DESPATCHED BY 3PM WITHIN 2 BUSINESS DAYS OF FAX STAMP DATE